

Surface Mount Silicon Zener Diodes in DO-15

Features

-
-
-
-
-
-



Mechanical Data

- Case:**
- Molding Compound Flammability Rating:**
- Terminals:**

Absolute Maximum Ratings

Ratings at 25°ambient temperature unless otherwise specified.

Parameter	Symbol	Value	UNIT
DC power dissipation at $T_L = 50\text{ }^\circ\text{C}^{(1)}$	P_D	5.0	W
Maximum forward voltage at $I_F = 200\text{ mA}$	V_F	1.5	V
Junction temperature range	T_J	- 55 to + 150	$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 to + 150	$^\circ\text{C}$


Note:

(1) T_L = Lead temperature at 3/8 " (9.5mm) from body


Typical Characteristics (T_{amb} = 25 °C unless otherwise specified)

Part Number	Nominal Zener Voltage @I _T			I _{ZT} (mA)	Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current I _{ZM} (mA)
	V _{Z AVE.} (V)	V _{Z MIN.} (V)	V _{Z MAX.} (V)		Z _{ZT MAX.} (Ω) @I _{ZT}	Z _{ZK MAX.} (Ω) @I _{ZK}	I _{ZK} (mA)	I _R (uA) @V _R	V _R (V)	
1N5333AD5	3.3	3.14	3.47	380	3.0	400	1.00	300	1.0	1437.0
1N5334AD5	3.6	3.42	3.78	350.0	2.5	500	1.00	150	1.0	1317.0
1N5335AD5	3.9	3.71	4.10	320.0	2.0	500	1.00	50	1.0	1216.0
1N5336AD5	4.3	4.09	4.52	290.0	2.0	500	1.00	10	1.0	1103.0
1N5337AD5	4.7	4.47	4.94	260.0	2.0	450	1.00	5	1.0	1009.0
1N5338AD5	5.1	4.85	5.36	240.0	1.5	400	1.00	1.0	1.0	930.0
1N5339AD5	5.6	5.32	5.88	220.0	1.0	400	1.00	1.0	2.0	846.0
1N5340AD5	6.0	5.70	6.30	200.0	1.0	300	1.00	1.0	3.0	790.0
1N5341AD5	6.2	5.89	6.51	200.0	1.0	200	1.00	1.0	3.0	765.0
1N5342AD5	6.8	6.46	7.14	175.0	1.0	200	1.00	10.0	5.2	700.0
1N5343AD5	7.5	7.13	7.88	175.0	1.5	200	1.00	10.0	5.7	630.0
1N5344AD5	8.2	7.79	8.61	150.0	1.5	200	1.00	10.0	6.2	580.0
1N5345AD5	8.7	8.27	9.14	150.0	2.0	200	1.00	10.0	6.6	545.0
1N5346AD5	9.1	8.65	9.56	150.0	2.0	150	1.00	7.5	6.9	520.0
1N5347AD5	10.0	9.50	10.50	125.0	2.0	125	1.00	5	7.6	475.0
1N5348AD5	11.0	10.45	11.55	125.0	2.5	125	1.00	5	8.4	430.0
1N5349AD5	12.0	11.40	12.60	100.0	2.5	125	1.00	2	9.1	395.0
1N5350AD5	13.0	12.35	13.65	100.0	2.5	100	1.00	1	9.9	365.0
1N5351AD5	14.0	13.30	14.70	100.0	2.5	75	1.00	1	10.6	340.0
1N5352AD5	15.0	14.25	15.75	75.0	2.5	75	1.00	1	11.5	315.0
1N5353AD5	16.0	15.20	16.80	75.0	2.5	75	1.00	1	12.2	295.0
1N5354AD5	17.0	16.15	17.85	70.0	2.5	75	1.00	0.5	12.9	280.0
1N5355AD5	18.0	17.10	18.90	65.0	2.5	75	1.00	0.5	13.7	265.0
1N5356AD5	19.0	18.05	19.95	65.0	3.0	75	1.00	0.5	14.4	250.0
1N5357AD5	20.0	19.00	21.00	65.0	3.0	75	1.00	0.5	15.2	237.0
1N5358AD5	22.0	20.90	23.10	50.0	3.5	75	1.00	0.5	16.7	216.0
1N5359AD5	24.0	22.80	25.20	50.0	3.5	100	1.00	0.5	18.2	198.0
1N5360AD5	25.0	23.75	26.25	50.0	4.0	110	1.00	0.5	19.0	190.0
1N5361AD5	27.0	25.65	28.35	50.0	5.0	120	1.00	0.5	20.6	176.0
1N5362AD5	28.0	26.60	29.40	50.0	6.0	130	1.00	0.5	21.2	170.0
1N5363AD5	30.0	28.50	31.50	40.0	8.0	140	1.00	0.5	22.8	158.0
1N5364AD5	33.0	31.35	34.65	40.0	10.0	150	1.00	0.5	25.1	144.0
1N5365AD5	36.0	34.20	37.80	30.0	11.0	160	1.00	0.5	27.4	132.0
1N5366AD5	39.0	37.05	40.95	30.0	14.0	170	1.00	0.5	29.7	122.0
1N5367AD5	43.0	40.85	45.15	30.0	20.0	190	1.00	0.5	32.7	110.0
1N5368AD5	47.0	44.65	49.35	25.0	25.0	210	1.00	0.5	35.8	100.0
1N5369AD5	51.0	48.45	53.55	25.0	27.0	230	1.00	0.5	38.8	93.0

Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

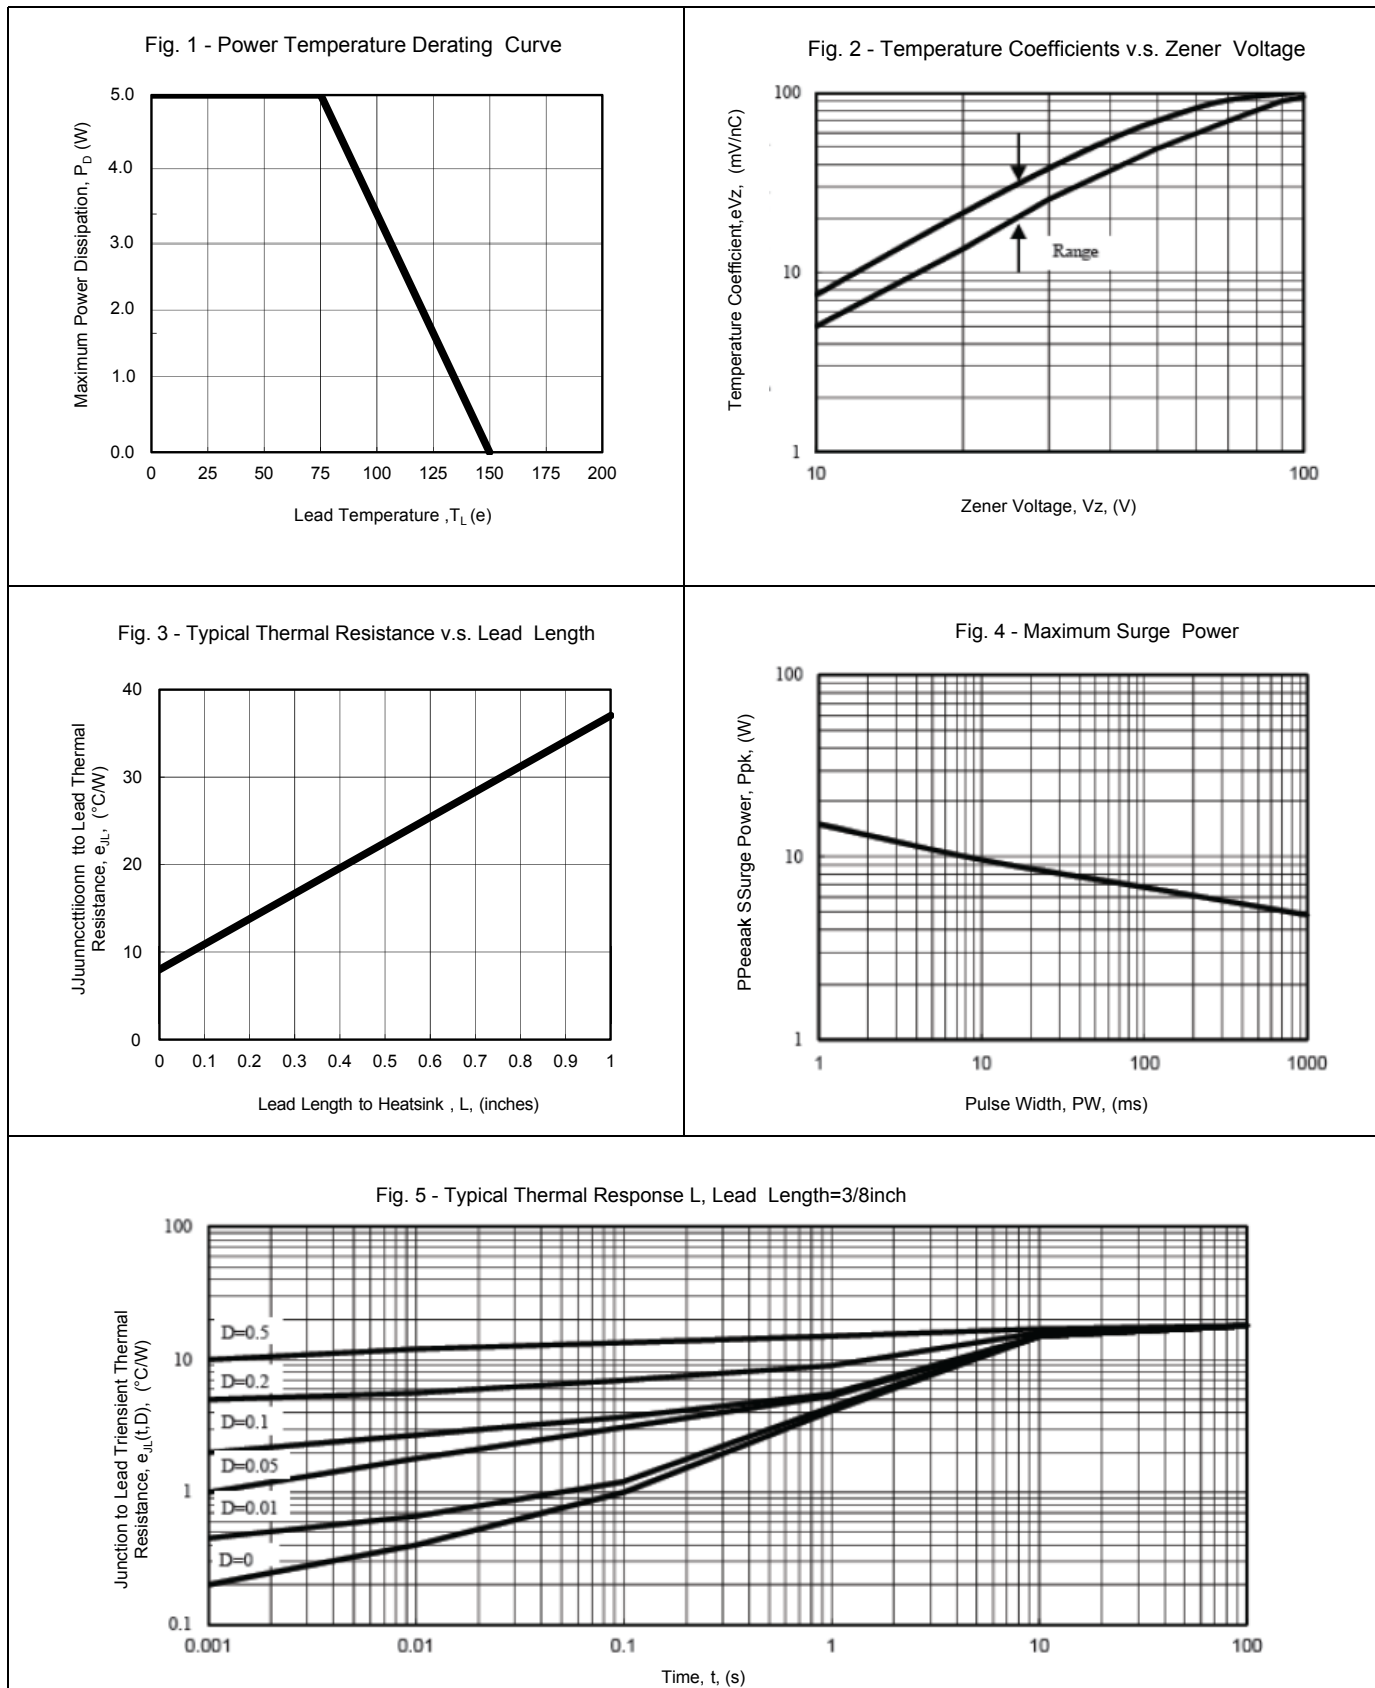

Package Dimensions

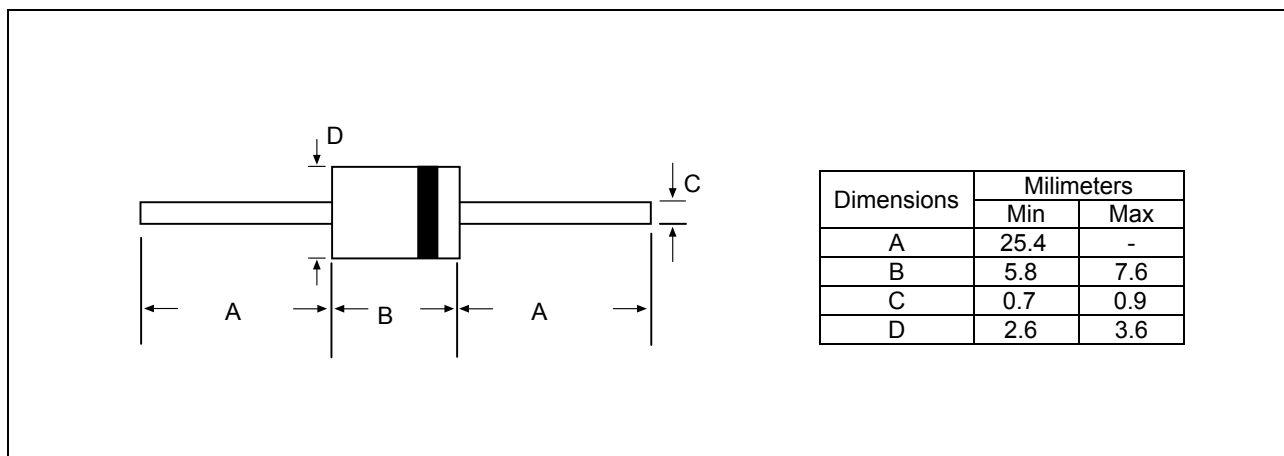

Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
1N53xxAD5	DO-15	BOX	3000pcs / reel	EIA STD RS-481

Revision history

Date	Revision	Changes
23-May-2012	1.0	Initial release

CAUTION / WARNING

Information in this document is believed to be accurate and reliable. However, CREATEK does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and CREATEK assumes no liability whatsoever relating to the choice, selection or use of the CREATEK products and services described herein.

CREATEK reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an CREATEK product can reasonably be expected to result in personal injury, death or severe property or environmental damage. CREATEK accepts no liability for inclusion and/or use of CREATEK products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.


This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Resale of CREATEK products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by CREATEK for the CREATEK product or service described herein and shall not create or extend in any manner whatsoever, any liability of CREATEK.

CREATEK expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. CREATEK only obligations are those in the CREATEK Standard Terms and Conditions of Sale and in no case will CREATEK be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

Specifications are subject to change without notice

© Copyright 2009, CREATEK Microelectronics

 **CREATEK**® is a registered trademark of CREATEK Microelectronics

All rights reserved